

Antenna 101110




LTE wall/roof antenna



Specifications:

| | |
|---------------------------|--|
| Frequency Range: | 680-960/1710-2690 MHz |
| Polarization: | Linear |
| Gain: | 2 dBi (Zenith) |
| V.S.W.R (min): | <2.0 / <2,9@ GSM850, 900 |
| Impedance: | 50 Ω |
| Cable: | 3 m RG174 |
| Connector: | SMA (male) |
| Material: | ABS |
| Mounting Method: | Screw |
| Operating Temperature: | -40°C to +85°C |
| Relative Humidity: | Up to 95% |
| Protection: | IP67 (exclude cable outlet) |
| Vibration: | 10 to 55Hz with 1.5 mm amplitude 2 hours |
| Environmentally Friendly: | ROHS Compliant |

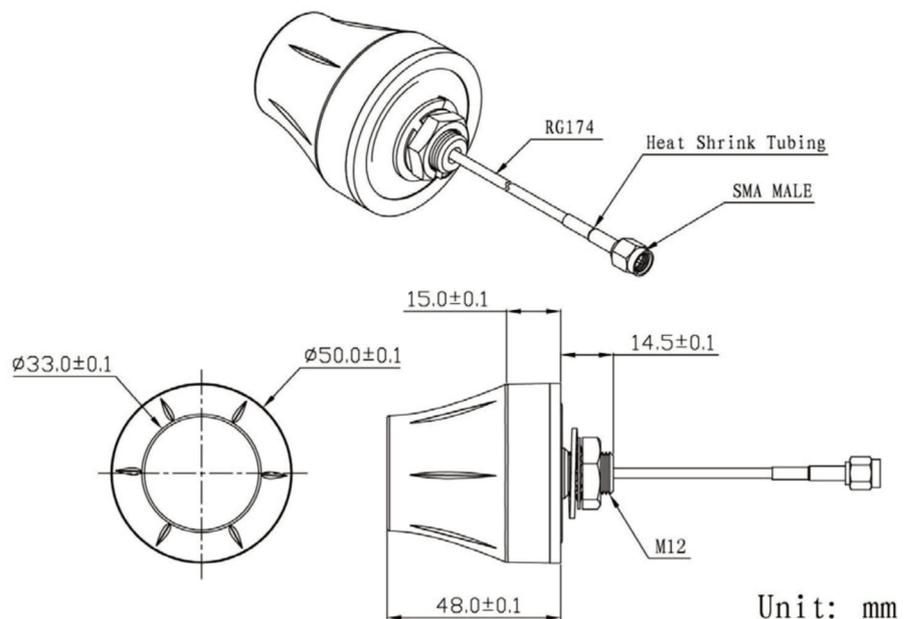

Antenna 101110



LTE wall/roof antenna



Pattern:

