

Antenna 101266



GPS antenna



Specification

Antenna

Center Frequency:	1575.42±1 MHz
Band Width:	CF±5 MHz
Polarization:	RHCP
Gain:	2 dBi
V.S.W.R:	<1.5
Impedance:	50 Ω
Axial Ratio:	3 dB (max.)
Dimension:	30.5 x 30.5 x 13.9 mm

LNA


Gain:	28±2 dB
Noise Figure:	<1.5 dB
Supply Voltage:	2.2-5 V DC
Current Consumption:	5-15 mA
V.S.W.R:	<2.0

Mechanical

Cable:	1.5 m RG174
Connector:	SMA (male)
Radome Material:	ABS
Mounting Method:	Screw

Environmental

Operating Temperature:	-40°C to +85°C
Relative Humidity:	Up to 95%
Vibration:	10 to 55 Hz with 1.5 mm amplitude 2hours
Environmentally Friendly:	ROHS Compliant

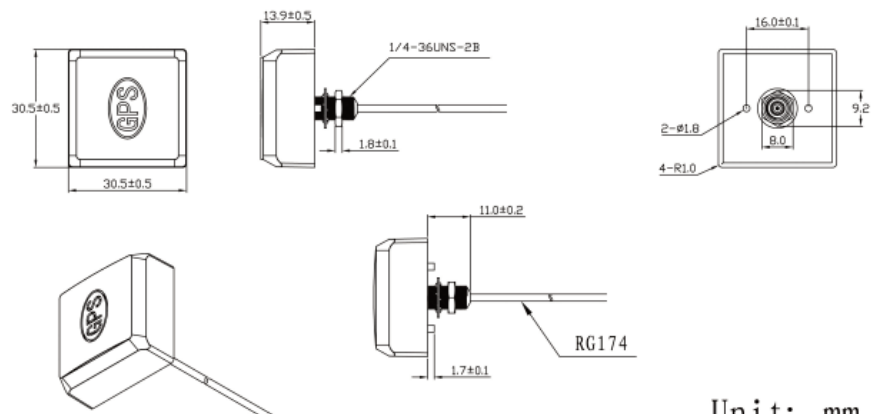

Unit: mm