

MC0114078-LTE-AA 101121



**GSM 850/900/1800/1900 MHz
+ LTE + UMTS**

GSM/UMTS/LTE




Specifications:

Frequency Range:	698-960MHz/1710-2690MHz
Polarization:	Linear
Gain:	2.5dBi (Zenith)
V.S.W.R (min):	<3.0
Impedance:	50Ω
Cable:	2m RG174
Connector:	SMA (male)
Material:	ABS
Mounting Method:	Screw
Operating Temperature:	-40°C to +85°C
Max. torque:	<3nm
Relative Humidity:	Up to 95%
Protection:	IP67 (exclude cable outlet)
Vibration:	10 to 55Hz with 1.5mm amplitude 2 hours
Environmentally Friendly:	ROHS Compliant

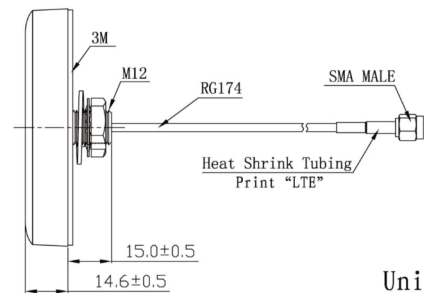

Unit: mm

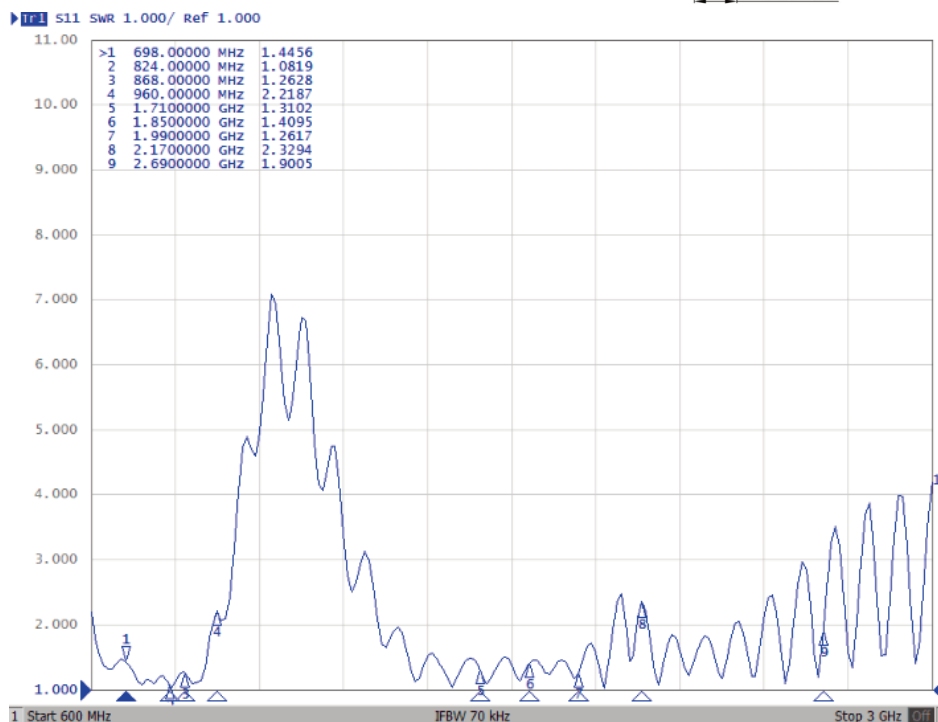

MC0114078-LTE-AA GSM/UMTS/LTE Antenna

Pattern:

